


# KOMATSU

**PC**  
**210**



## Hydraulic Excavator **PC210/LC/NLC-8**

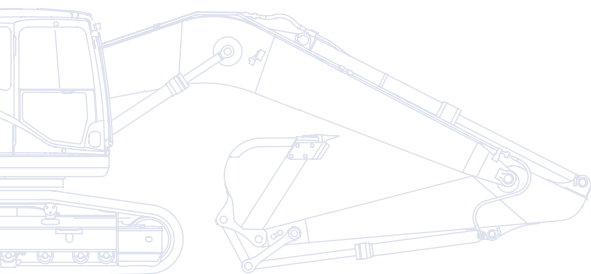

### ENGINE POWER

116 kW / 156 HP @ 2.000 rpm

### OPERATING WEIGHT

PC210-8: 21.390 - 22.830 kg

PC210LC-8: 21.990 - 23.750 kg

PC210NLC-8: 21.830 - 23.360 kg

### BUCKET CAPACITY


max. 1,68 m<sup>3</sup>

# Walk-Around

The Komatsu Dash 8 crawler excavators set new worldwide standards for construction equipment. Operator safety and comfort is a focal point in their design, and their outstanding performance and specifications will contribute directly to the success of your business. With standard auxiliary hydraulic systems and quick-coupler power lines, these machines are ready to take on any job, whenever and wherever you need it done. Safely rely on Komatsu's 80 years of experience and commitment to Quality and Durability: your Dash 8 crawler excavator will quickly become your number one business partner.

## Powerful and environmentally friendly

- Low consumption ecot3 engine
- Komatsu integrated hydraulic system
- Eco-gauge and idle caution
- Reduced wastage

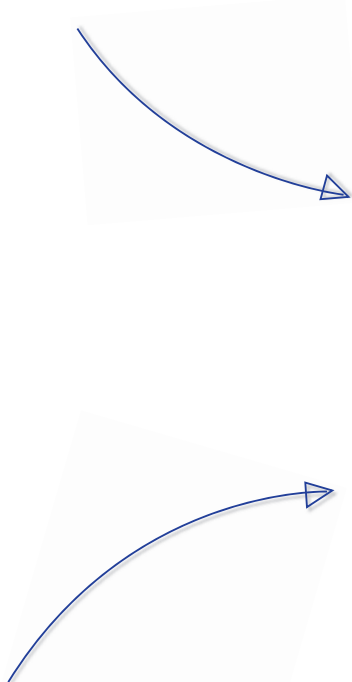

## Total versatility

- Ideal for a wide range of applications
- 5 working modes
- Wide choice of options
- Built-in versatility



# PC210-8

## ENGINE POWER

116 kW / 156 HP @ 2.000 rpm

## OPERATING WEIGHT

PC210-8: 21.390 - 22.830 kg

PC210LC-8: 21.990 - 23.750 kg

PC210NLC-8: 21.830 - 23.360 kg

## BUCKET CAPACITY

max. 1,68 m<sup>3</sup>

## Highest safety standards

- Safe SpaceCab™
- Rear view camera
- Optimal jobsite safety
- Safe access, easy maintenance
- Falling Object Protection System (FOPS) optional



## First-class operator comfort

- Wide, spacious cab
- Low noise design
- Low vibration levels
- Pressurised cab
- Large, widescreen TFT monitor panel



**KOMTRAX**

Komatsu Satellite  
Monitoring System

## Quality you can rely on

- Reliable and efficient
- Rugged design
- Komatsu-quality components
- Extensive dealer support network

# Total Versatility

## Ideal for a wide range of applications

Powerful and precise, the Komatsu PC210-8 is equipped to efficiently carry out any task your business requires. On big sites or small, for digging, trenching, landscaping or site preparation, the Komatsu original equipment hydraulic system always ensures maximum productivity and control.

## 5 working modes

Power, Lifting, Breaker, Attachment, and Economy.

The PC210-8 features 5 selectable working modes that optimise performance and fuel usage. The Economy mode can be adjusted for an ideal balance between power and economy to match your work. The oil flow delivered to hydraulic attachments is adjustable directly on the class-leading wide screen monitor panel.

## Built-in versatility

To allow the use of many attachments, such as buckets, breakers or demolition tools, a power supply for a hydraulic quick coupler with adjustable pressure settings, and an additional hydraulic circuit controlled by a foot pedal and a sliding joystick push button are standard on the PC210-8. A second optional auxiliary line is also available for attachments that require extra hydraulic actuation.

## A wide choice of options

With a choice of different styles of boom, arm and undercarriage, you can configure the PC210-8 to match specific demands for transport, working envelope or duty. The excavator can for instance be equipped with Komatsu's own Super Long Front end equipment, to let the machine work in otherwise inaccessible areas. Extra hydraulic arrangements are available for every boom and arm configuration, making sure that the machine always contributes strongly to your business.





# Powerful and Environmentally Friendly

## Low consumption ecot3 engine

The Komatsu SAA6D107E-1 engine provides high torque, a better performance at low speed and low fuel consumption. This ecot3 engine features a new combustion chamber design with optimised ignition and combustion timing. The operating pressure of the new common rail system was increased for improved injection and fuel efficiency. The air-to-air charge cooler reduces the temperature of the compressed air supplied by the turbo charger to the cylinders, and further improves fuel consumption.

## Meets EU Stage IIIA

The new Komatsu ecot3 engine technology reduces NOx and particle emissions, fuel consumption and noise level. The Komatsu SAA6D107E-1 engine is certified for EU Stage IIIA emission regulations. To further reduce the machine's emissions, a Diesel Particulate Filter is also available.


## Komatsu integrated hydraulic system

The PC210-8 is a highly responsive and productive machine with all major hydraulic parts designed and manufactured by Komatsu. The electronic Closed Load Sensing hydraulic System (CLSS) offers complete control during individual or combined movements - without sacrificing performance or productivity.

## Eco-gauge and idle caution

The unique ECO-gauge helps the operator reduce emissions and fuel consumption for environmentally friendly and energy saving operations. And to further avoid wasting fuel when the machine is not actually working, a standard-fit idle caution is displayed if the engine idles for 5 minutes or more.

Komatsu SAA6D107E-1



Eco-gauge



Idle caution





## Reduced wastage

To avoid spillage of excess grease – and prolong the life of your machine – the PC210-8 can be equipped with an automatic greasing system that provides precisely the correct amount of grease when and where it's required.



# First-Class Operator Comfort

## Wide spacious cab

The newly designed, wide and spacious cab includes a heated air suspension seat with a reclining backrest. The seat height and longitudinal inclination are easily adjusted with a pull-up lever. You can also set the operational posture of the armrest and the position of the console or recline the seat all the way and place it into a fully flat state with the headrest attached.

## Pressurised cab

An automatic air conditioner, an air filter and a positive internal air pressure (60 Pa) combine to prevent external dust from entering the cab.

## Low noise design

Komatsu Dash 8 crawler excavators feature the lowest in-class external noise levels and are especially well-suited for work in confined spaces or urban areas. Reduced fan speed, a large capacity radiator, and the optimal usage of sound insulation and of sound absorbing materials help to make noise levels inside Dash 8 excavators comparable to those inside an executive car.

## Cab damper mounting

The built-in stability of the Komatsu PC210-8, combined with a highly rigid deck and a sprung multi-layer viscous mount system, drastically reduces vibration levels for the operator.



*Automatic air conditioner*



*Hot and cool box*



*Joysticks with proportional control button for attachments*







## Large, widescreen TFT monitor

To enable safe, accurate and smooth work, the user friendly monitor is the highly intuitive user interface for the machine's Equipment Management and Monitoring System (EMMS). Multilingual and with all essential information available at a glance, it features simple and easy to operate switches and multifunction keys that provide the operator with fingertip access to a wide range of functions and operating information.





# Highest Safety Standards

## Safe SpaceCab™

Specifically designed for Komatsu excavators, the Dash 8 cab has a tubular steel frame. It provides very high shock absorbency, impact resistance and durability. The seat belt is designed to keep the operator in the safety zone of the cab in the event of a roll-over. At your request, the Komatsu PC210-8 can also be fitted with an ISO 10262 Level 2 Falling Object Protective System (FOPS).

## Safe and easy maintenance


Thermal guards are placed around high temperature parts of the engine. The fan belt and pulleys are well protected and in case of damage, fire risk is reduced by a pump/engine partition that prevents hydraulic oil from spraying onto the engine.

## Optimal job site safety


Safety features on the Komatsu PC210-8 comply with the latest industry standards and work together as a system to minimise risks to personnel in and around the machine. An audible travel alarm further promotes job site safety. Very durable anti-slip plates – with additional high friction covering – maintain long term traction performance.

## Rear view camera

A standard fitment camera gives an exceptionally clear view of the rear work zone on the wide-screen monitor panel. Large mirrors on both sides ensure that machine visibility meets the latest ISO standards.

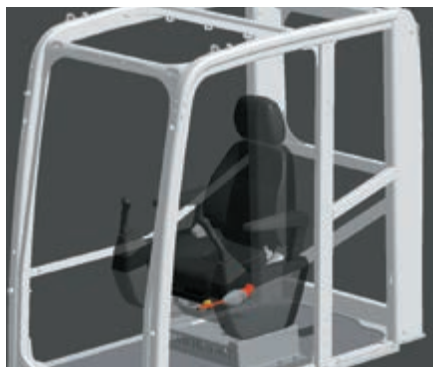

Safe SpaceCab™

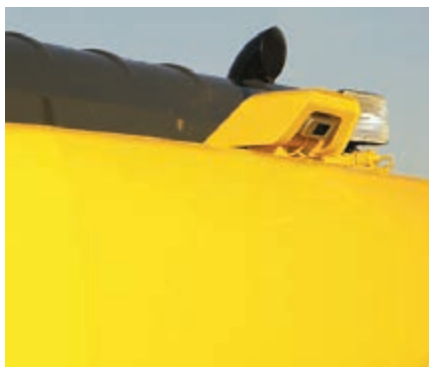

Rear view camera



Anti-slip plates



# Quality You Can Rely On

## Reliable and efficient

Productivity is the key to success – all major components of the PC210-8 are designed and directly manufactured by Komatsu. Essential machine functions are perfectly matched for a highly reliable and productive machine.

## Rugged design

Maximum toughness and durability – along with top class customer service – are the cornerstones of Komatsu's philosophy. Single piece plates and castings are used in key areas of the machine's structure for good load distribution. Highly durable rubbing strips on the underside of the arm protect the structure from material falling from the bucket.

## Komatsu-quality components

With the latest computer design techniques and a thorough test programme, Komatsu's global know-how produces machines that are designed, manufactured and tested to meet your highest standards.

## Extensive dealer support network

The extensive Komatsu distribution and dealer network is standing by to help keep your fleet in optimum condition. Customised servicing packages are available, with express availability of spare parts, to make sure that your Komatsu will continue to perform at its peak.



Cast boom foot



Single piece boom plates



# Komatsu Satellite Monitoring System



KOMTRAX™ is a revolutionary machine tracking system designed to save you time and money. You can now monitor your equipment anytime and anywhere. Use valuable machine data received via the KOMTRAX™ web site to optimise your maintenance planning and machine performances.

KOMTRAX™ can assist you with:

## **Full machine monitoring**

Get detailed operation data to know when your machines are used and how productive they are.

## **Total Fleet Management**

Keep track of the location of your machines at all times and discourage unapproved usage or theft.

## **Complete machine status**

Receive warnings, alerts and cautions, via a web site or by e-mail, to help with maintenance planning and for longer machine life.

For further details on KOMTRAX™, please ask your Komatsu dealer for the latest KOMTRAX™ brochure.






*Machine working time - With the “daily working record” chart, get precise engine running time data: when your machine was started and when it was shut down, as well as total engine running time.*




*Maintenance planning - To increase productivity and improve maintenance planning, alerts indicate when items such as filters or oil must be replaced.*

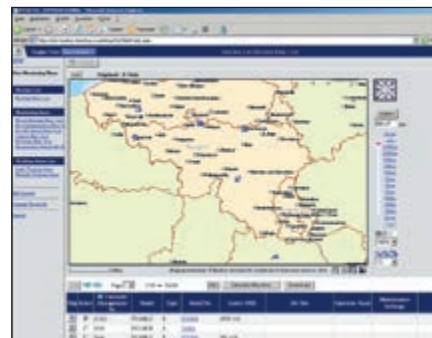

*Fleet location - The machine list instantly locates all your machines, even those in other countries.*



*Machine tracking during transport - When your machine is transported, KOMTRAX™ sends travel messages to the web site or by e-mail to inform you of its progress, and confirms when it reaches its destination.*

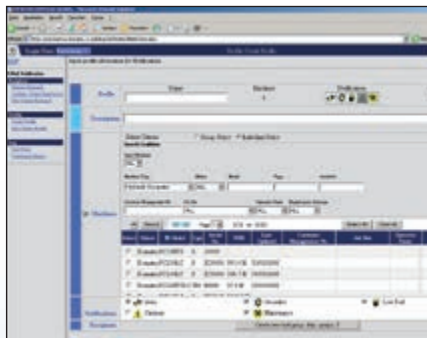

*Alarm notifications - You can receive notification of alarms both via the KOMTRAX™ website and by e-mail.*




*Added security - The “engine lock” feature allows to program when a machine’s engine can be started. And with “geo-fence”, KOMTRAX™ sends notification every time your machine moves in or out of a predetermined operating area.*



# Easy Maintenance


## Side-by-side cooling

Since the radiator, aftercooler and oil cooler are arranged in parallel, it is easy to clean, remove and install them.

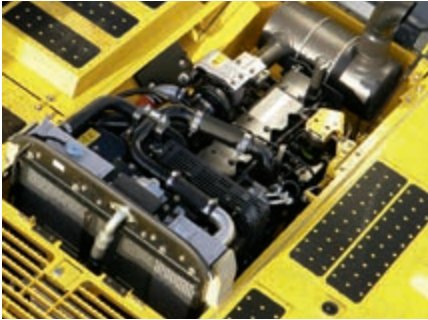

## Easy access to the engine oil filter and fuel drain valve

The engine oil filter and fuel drain valve are mounted remotely to improve accessibility.

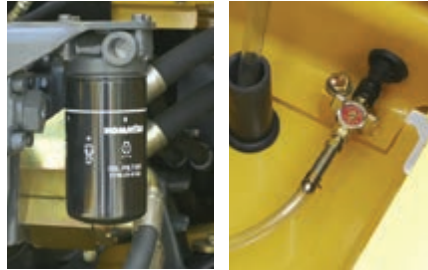

## Gas-assisted engine hood damper cylinders

The engine hood can be easily opened and closed with help of the gas-assisted engine hood damper cylinders.



## Water separator

This is standard equipment which removes any water that has become mixed with the fuel, preventing fuel system damage.



## Washable floor

The floor is easy to keep clean. The gently inclined surface has a flanged floormat and drainage holes to facilitate runoff.

## Inclined track frame

The track frame is sloped so that dirt will not accumulate and can be removed easily.

## Long-life oil filters

The hydraulic oil filter uses high-performance filtering material for long element replacement intervals, which significantly reduces maintenance costs.



## Flexible warranty

When you purchase Komatsu equipment, you gain access to a broad range of programmes and services that have been designed to help you get the most from your investment. For example, Komatsu's Flexible Warranty Programme provides a range of extended warranty options on the machine and its components. These can be chosen to meet your individual needs and activities. This programme is designed to help reduce total operating costs.





## ENGINE

Model .....	Komatsu SAA6D107E-1
Type .....	Common rail direct injection, water-cooled, emissionised, turbocharged, after-cooled diesel
Engine power	
at rated engine speed .....	2.000 rpm
ISO 14396 .....	116 kW / 156 HP
ISO 9249 (net engine power) .....	110 kW / 148 HP
No. of cylinders .....	6
Bore x stroke .....	107 x 124 mm
Displacement .....	6,69 ltr
Battery .....	2 x 12 V/140 Ah
Alternator .....	24 V/60 A
Starter motor .....	24 V/5,5 kW
Air filter type .....	Double element type with monitor panel dust indicator and auto dust evacuator
Cooling .....	Suction type cooling fan with radiator fly screen

## HYDRAULIC SYSTEM

Type .....	HydrauMind. Closed-centre system with load sensing and pressure compensation valves
Additional circuits .....	Depending on the specification up to 2 additional circuits can be installed
Main pump .....	2 variable displacement piston pumps supplying boom, arm, bucket, swing and travel circuits
Maximum pump flow .....	2 x 219 ltr/min
Relief valve settings	
Implement .....	380 bar
Travel .....	380 bar
Swing .....	295 bar
Pilot circuit .....	33 bar

## UNDERCARRIAGE

Construction .....	X-frame centre section with box section track frames
Track assembly	
Type .....	Fully sealed
Shoes (each side) .....	45 (PC210), 49 (PC210LC/NLC)
Tension .....	Combined spring and hydraulic unit
Rollers	
Track rollers (each side) .....	7 (PC210), 9 (PC210LC/NLC)
Carrier rollers (each side) .....	2

## OPERATING WEIGHT (APPR.)

	MONO BOOM						TWO-PIECE BOOM					
	PC210-8		PC210LC-8		PC210NLC-8		PC210-8		PC210LC-8		PC210NLC-8	
Triple grouser shoes	Operating weight	Ground pressure	Operating weight	Ground pressure	Operating weight	Ground pressure	Operating weight	Ground pressure	Operating weight	Ground pressure	Operating weight	Ground pressure
500 mm	-	-	-	-	21.830 kg	0,55 kg/cm <sup>2</sup>					22.730 kg	0,57 kg/cm <sup>2</sup>
600 mm	21.390 kg	0,50 kg/cm <sup>2</sup>	21.990 kg	0,46 kg/cm <sup>2</sup>	22.190 kg	0,47 kg/cm <sup>2</sup>	22.290 kg	0,52 kg/cm <sup>2</sup>	22.890 kg	0,48 kg/cm <sup>2</sup>	23.090 kg	0,48 kg/cm <sup>2</sup>
700 mm	21.640 kg	0,43 kg/cm <sup>2</sup>	22.260 kg	0,40 kg/cm <sup>2</sup>	22.460 kg	0,40 kg/cm <sup>2</sup>	22.540 kg	0,45 kg/cm <sup>2</sup>	23.160 kg	0,42 kg/cm <sup>2</sup>	23.360 kg	0,42 kg/cm <sup>2</sup>
800 mm	21.930 kg	0,38 kg/cm <sup>2</sup>	22.580 kg	0,36 kg/cm <sup>2</sup>	-	-	22.830 kg	0,40 kg/cm <sup>2</sup>	23.480 kg	0,37 kg/cm <sup>2</sup>		
900 mm	-	-	22.850 kg	0,32 kg/cm <sup>2</sup>	-	-			23.750 kg	0,33 kg/cm <sup>2</sup>		

Operating weight, including 2,9 m arm, 900 kg bucket, operator, lubricant, coolant, full fuel tank and the standard equipment.

## SWING SYSTEM

Type .....	Axial piston motor driving through planetary double reduction gearbox
Swing lock .....	Electrically actuated wet multi-disc brake integrated into swing motor
Swing speed .....	0 - 12,4 rpm
Swing torque .....	68 kNm
Max. pressure .....	295 bar

## DRIVES AND BRAKES

Steering control .....	2 levers with pedals giving full independent control of each track
Drive method .....	Hydrostatic
Travel operation .....	Automatic 3-speed selection
Gradeability .....	70%, 35°
Max. travel speeds	
Lo / Mi / Hi .....	3,0 / 4,1 / 5,5 km/h
Maximum drawbar pull .....	18.200 kg
Brake system .....	Hydraulically operated discs in each travel motor

## SERVICE REFILL CAPACITIES


Fuel tank .....	325,0 ltr
Radiator .....	20,4 ltr
Engine oil .....	23,1 ltr
Swing drive .....	6,6 ltr
Hydraulic tank .....	137,0 ltr
Final drive (each side) .....	3,3 ltr

## ENVIRONMENT


Engine emissions .....	Fully complies with EU Stage IIIA exhaust emission regulations
Noise levels	
LwA external .....	102 dB(A) (2000/14/EC Stage II)
LpA operator ear .....	69 dB(A) (ISO 6396 dynamic test)
Vibration levels (EN 12096:1997)	
Hand/arm .....	≤ 2,5 m/s <sup>2</sup> (uncertainty K = 0,49 m/s <sup>2</sup> )
Body .....	≤ 0,5 m/s <sup>2</sup> (uncertainty K = 0,24 m/s <sup>2</sup> )
Contains fluorinated greenhouse gas HFC-134a (GWP 1430).	
Quantity of gas 0,9 kg, CO <sub>2</sub> equivalent 1,29 t	

# Dimensions & Performance Figures


MACHINE DIMENSIONS	PC210-8	PC210LC-8	PC210NLC-8
A Overall width of upper structure	2.500 mm	2.500 mm	2.500 mm
B Overall height of cab	3.035 mm	3.035 mm	3.035 mm
C Overall length of basic machine	4.810 mm	4.995 mm	4.995 mm
D Tail length	2.770 mm	2.770 mm	2.770 mm
Tail swing radius	2.800 mm	2.800 mm	2.800 mm
E Clearance under counterweight	1.100 mm	1.100 mm	1.100 mm
F Machine tail height	2.110 mm	2.110 mm	2.110 mm
G Ground clearance	440 mm	440 mm	440 mm
H Tumbler centre distance	3.275 mm	3.655 mm	3.655 mm
I Track length	4.080 mm	4.450 mm	4.450 mm
J Track gauge	2.200 mm	2.380 mm	2.040 mm
K Track shoe width	500, 600, 700, 800 mm	600, 700, 800, 900 mm	500, 600, 700 mm
L Overall track width with 500 mm shoe	-	-	2.540 mm
Overall track width with 600 mm shoe	2.800 mm	2.980 mm	2.640 mm
Overall track width with 700 mm shoe	2.900 mm	3.080 mm	2.740 mm
Overall track width with 800 mm shoe	3.000 mm	3.180 mm	-
Overall track width with 900 mm shoe	-	3.280 mm	-

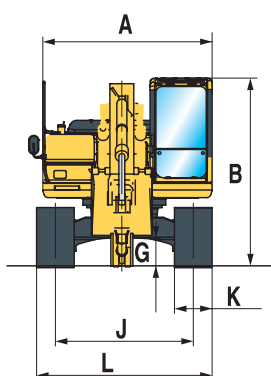

MONO BOOM

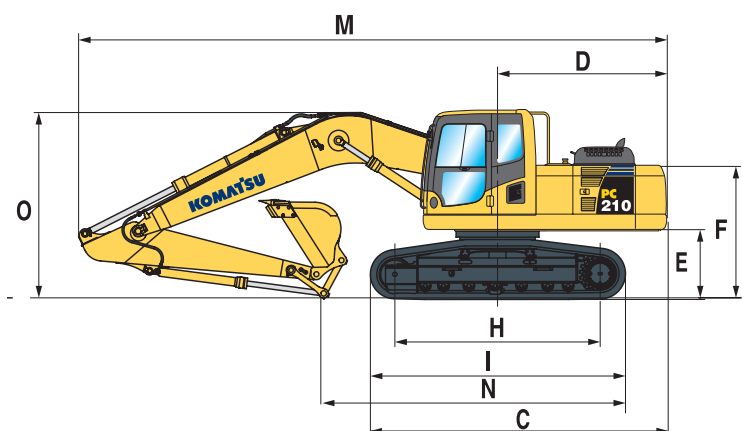

TWO-PIECE BOOM

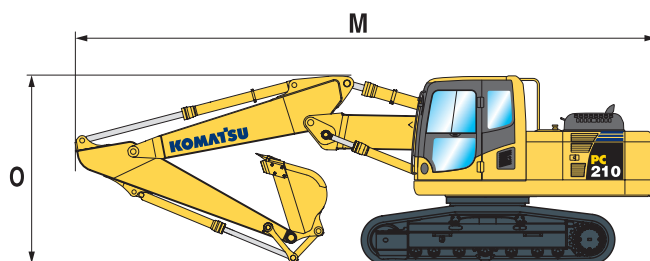

TRANSPORT DIMENSIONS	MONO BOOM			TWO-PIECE BOOM		
Arm length	1,8 m	2,4 m	2,9 m	1,8 m	2,4 m	2,9 m
M Transport length	9.540 mm	9.555 mm	9.485 mm	9.515 mm	9.420 mm	9.395 mm
N Length on ground (transport) PC210	6.270 mm	5.700 mm	4.815 mm	6.390 mm	5.970 mm	5.185 mm
Length on ground (transport) PC210LC/NLC	6.455 mm	5.885 mm	5.000 mm	6.580 mm	6.160 mm	5.375 mm
O Overall height (to top of boom)	2.985 mm	3.190 mm	2.970 mm	2.865 mm	3.090 mm	3.030 mm

**PC210-8 / MAX. BUCKET CAPACITY AND WEIGHT**

<b>MONO BOOM</b>						
<b>Arm length</b>	<b>1,8 m</b>		<b>2,4 m</b>		<b>2,9 m</b>	
Material weight up to 1,2 t/m <sup>3</sup>	1,56 m <sup>3</sup>	1.100 kg	1,38 m <sup>3</sup>	1.025 kg	1,27 m <sup>3</sup>	950 kg
Material weight up to 1,5 t/m <sup>3</sup>	1,33 m <sup>3</sup>	1.000 kg	1,18 m <sup>3</sup>	925 kg	1,08 m <sup>3</sup>	875 kg
Material weight up to 1,8 t/m <sup>3</sup>	1,15 m <sup>3</sup>	900 kg	1,00 m <sup>3</sup>	850 kg	0,94 m <sup>3</sup>	800 kg

<b>TWO-PIECE BOOM</b>						
<b>Arm length</b>	<b>1,8 m</b>		<b>2,4 m</b>		<b>2,9 m</b>	
Material weight up to 1,2 t/m <sup>3</sup>	1,47 m <sup>3</sup>	1.075 kg	1,30 m <sup>3</sup>	975 kg	1,18 m <sup>3</sup>	925 kg
Material weight up to 1,5 t/m <sup>3</sup>	1,25 m <sup>3</sup>	950 kg	1,10 m <sup>3</sup>	875 kg	1,00 m <sup>3</sup>	825 kg
Material weight up to 1,8 t/m <sup>3</sup>	1,09 m <sup>3</sup>	875 kg	0,96 m <sup>3</sup>	800 kg	0,87 m <sup>3</sup>	750 kg

**PC210LC-8 / MAX. BUCKET CAPACITY AND WEIGHT**

<b>MONO BOOM</b>						
<b>Arm length</b>	<b>1,8 m</b>		<b>2,4 m</b>		<b>2,9 m</b>	
Material weight up to 1,2 t/m <sup>3</sup>	1,68 m <sup>3</sup>	1.200 kg	1,62 m <sup>3</sup>	1.150 kg	1,47 m <sup>3</sup>	1.075 kg
Material weight up to 1,5 t/m <sup>3</sup>	1,50 m <sup>3</sup>	1.075 kg	1,38 m <sup>3</sup>	1.025 kg	1,25 m <sup>3</sup>	950 kg
Material weight up to 1,8 t/m <sup>3</sup>	1,30 m <sup>3</sup>	975 kg	1,20 m <sup>3</sup>	925 kg	1,09 m <sup>3</sup>	875 kg

<b>TWO-PIECE BOOM</b>						
<b>Arm length</b>	<b>1,8 m</b>		<b>2,4 m</b>		<b>2,9 m</b>	
Material weight up to 1,2 t/m <sup>3</sup>	1,68 m <sup>3</sup>	1.200 kg	1,50 m <sup>3</sup>	1.075 kg	1,38 m <sup>3</sup>	1.025 kg
Material weight up to 1,5 t/m <sup>3</sup>	1,45 m <sup>3</sup>	1.050 kg	1,28 m <sup>3</sup>	975 kg	1,18 m <sup>3</sup>	925 kg
Material weight up to 1,8 t/m <sup>3</sup>	1,26 m <sup>3</sup>	950 kg	1,11 m <sup>3</sup>	875 kg	1,02 m <sup>3</sup>	850 kg

**PC210NLC-8 / MAX. BUCKET CAPACITY AND WEIGHT**

<b>MONO BOOM</b>						
<b>Arm length</b>	<b>1,8 m</b>		<b>2,4 m</b>		<b>2,9 m</b>	
Material weight up to 1,2 t/m <sup>3</sup>	1,53 m <sup>3</sup>	1.100 kg	1,38 m <sup>3</sup>	1.025 kg	1,24 m <sup>3</sup>	950 kg
Material weight up to 1,5 t/m <sup>3</sup>	1,30 m <sup>3</sup>	975 kg	1,18 m <sup>3</sup>	925 kg	1,05 m <sup>3</sup>	850 kg
Material weight up to 1,8 t/m <sup>3</sup>	1,13 m <sup>3</sup>	900 kg	1,00 m <sup>3</sup>	850 kg	0,91 m <sup>3</sup>	775 kg

<b>TWO-PIECE BOOM</b>						
<b>Arm length</b>	<b>1,8 m</b>		<b>2,4 m</b>		<b>2,9 m</b>	
Material weight up to 1,2 t/m <sup>3</sup>	1,44 m <sup>3</sup>	1.050 kg	1,27 m <sup>3</sup>	950 kg	1,15 m <sup>3</sup>	900 kg
Material weight up to 1,5 t/m <sup>3</sup>	1,23 m <sup>3</sup>	950 kg	1,08 m <sup>3</sup>	875 kg	0,98 m <sup>3</sup>	825 kg
Material weight up to 1,8 t/m <sup>3</sup>	1,07 m <sup>3</sup>	850 kg	0,94 m <sup>3</sup>	800 kg	0,85 m <sup>3</sup>	750 kg

Max. capacity and weight have been calculated according to ISO 10567:2007.


Please consult with your distributor for the correct selection of buckets and attachments to suit the application.

**BUCKET AND ARM FORCE**

<b>Arm length</b>	<b>1,8 m</b>	<b>2,4 m</b>	<b>2,9 m</b>
Bucket digging force	16.500 kg	16.500 kg	14.100 kg
Bucket digging force at PowerMax	17.500 kg	17.500 kg	15.200 kg
Arm crowd force	13.800 kg	12.200 kg	10.300 kg
Arm crowd force at PowerMax	14.800 kg	13.000 kg	11.000 kg


# Working Range

## MONO BOOM

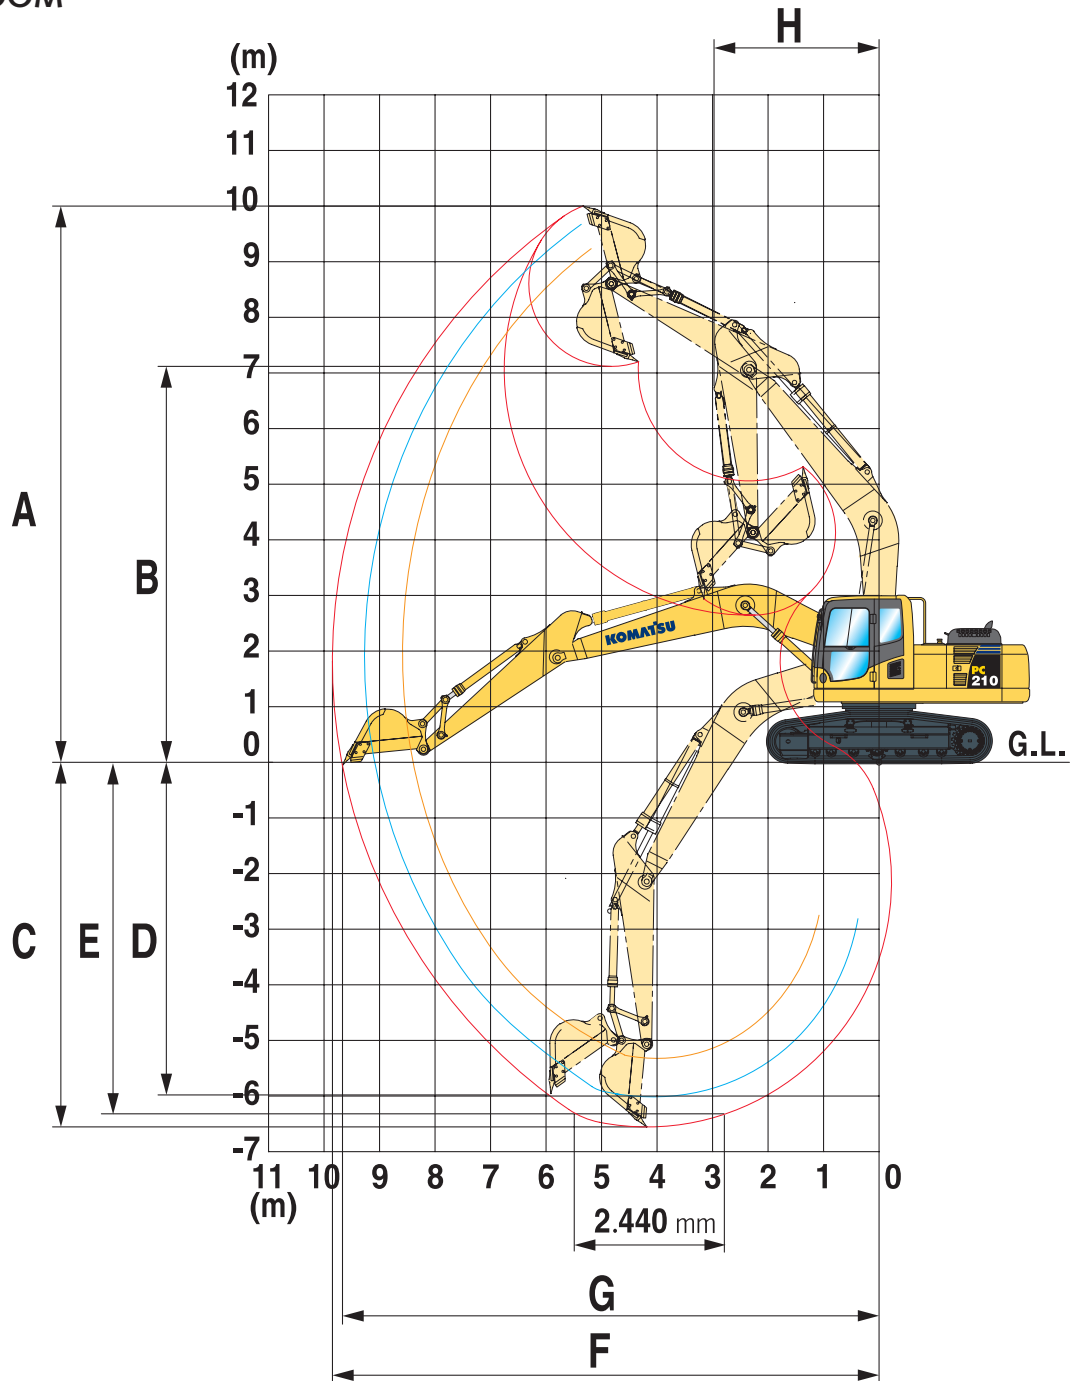

ARM LENGTH	1,8 m	2,4 m	2,9 m
A Max. digging height	9.500 mm	9.800 mm	10.000 mm
B Max. dumping height	6.630 mm	6.890 mm	7.110 mm
C Max. digging depth	5.380 mm	6.095 mm	6.620 mm
D Max. vertical wall digging depth	4.630 mm	5.430 mm	5.980 mm
E Max. digging depth of cut for 2,44 m level	5.130 mm	5.780 mm	6.370 mm
F Max. digging reach	8.850 mm	9.380 mm	9.875 mm
G Max. digging reach at ground level	8.660 mm	9.190 mm	9.700 mm
H Min. swing radius	3.010 mm	3.090 mm	3.040 mm



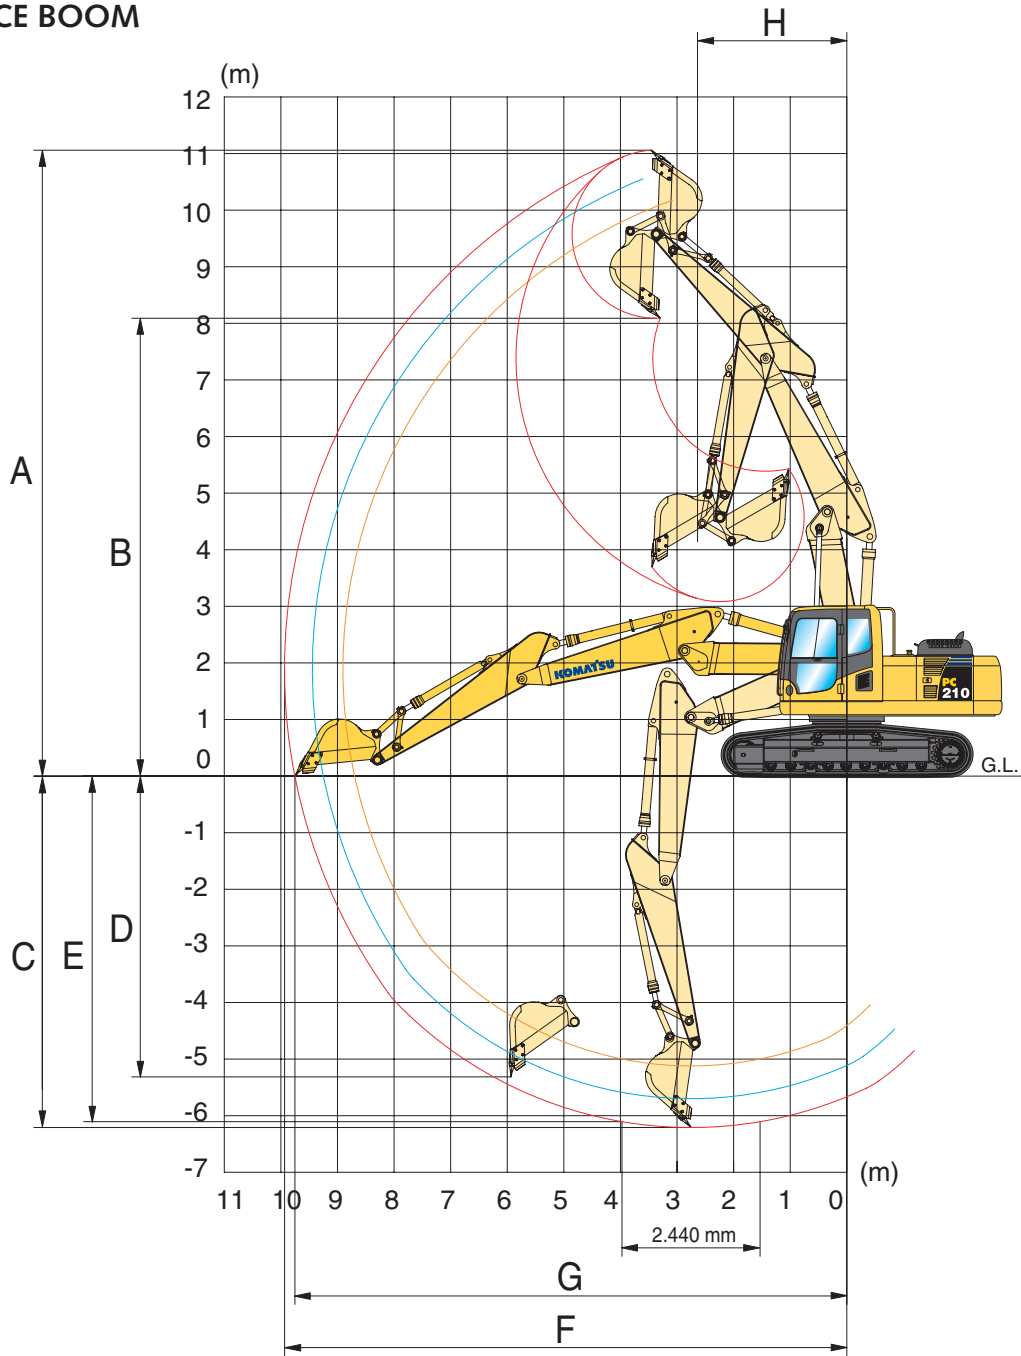













## TWO-PIECE BOOM




ARM LENGTH	1,8 m	2,4 m	2,9 m
A Max. digging height	10.260 mm	10.660 mm	11.060 mm
B Max. dumping height	7.295 mm	7.695 mm	8.090 mm
C Max. digging depth	5.120 mm	5.700 mm	6.210 mm
D Max. vertical wall digging depth	4.040 mm	4.745 mm	5.250 mm
E Max. digging depth of cut for 2,44 m level	5.000 mm	5.590 mm	6.105 mm
F Max. digging reach	8.900 mm	9.440 mm	9.935 mm
G Max. digging reach at ground level	8.695 mm	9.250 mm	9.750 mm
H Min. swing radius	3.105 mm	2.890 mm	2.640 mm

# Lifting Capacity

## PC210-8 MONO BOOM

Arm length	A		7,5 m		6,0 m		4,5 m		3,0 m		1,5 m			
	B													
 2,9 m  760 kg	7,5 m	kg	*2.800	*2.800		*4.150	*4.150							
	6,0 m	kg	*2.650	2.600	*3.450	2.800	*4.250	*4.250						
	4,5 m	kg	*2.650	2.150	4.150	2.750	*4.850	4.150	*5.400	*5.400				
	3,0 m	kg	*2.750	1.950	4.000	2.600	*5.800	3.900	*7.350	6.200	*11.450	*11.450		
	1,5 m	kg	2.950	1.850	3.850	2.500	5.550	3.600	8.900	5.600	*6.350	*6.350		
	0,0 m	kg	3.000	1.850	3.700	2.350	5.300	3.400	8.450	5.200	*7.200	*7.200		
	-1,5 m	kg	3.250	2.050	3.650	2.300	5.200	3.250	8.250	5.050	*10.450	9.800	*6.300	*6.300
	-3,0 m	kg	3.900	2.450			5.200	3.250	8.300	5.100	*15.250	10.000	*10.050	*10.050
-4,5 m	kg	5.400	3.450					8.550	5.300	*12.950	10.450			
 2,4 m  760 kg	7,5 m	kg	*4.150	*4.150										
	6,0 m	kg	*3.950	3.000			*4.750	4.200						
	4,5 m	kg	3.750	2.450	4.050	2.650	*5.350	4.050	*6.200	*6.200				
	3,0 m	kg	3.400	2.200	3.950	2.550	5.800	3.800	*8.050	6.000				
	1,5 m	kg	3.250	2.050	3.800	2.450	5.500	3.550	8.700	5.450				
	0,0 m	kg	3.350	2.100	3.700	2.350	5.300	3.350	8.350	5.150	*6.750	*6.750		
	-1,5 m	kg	3.700	2.350	3.700	2.350	5.200	3.300	8.300	5.100	*11.600	9.900	*7.300	*7.300
	-3,0 m	kg	4.550	2.900			5.250	3.350	8.400	5.150	*14.500	10.200	*12.150	*12.150
-4,5 m	kg	*6.800	4.450					*8.100	5.450	*11.500	10.700			
 1,8 m  760 kg	7,5 m	kg	*4.950	*4.950										
	6,0 m	kg	*4.550	3.450			*5.450	4.150	*5.750	*5.750				
	4,5 m	kg	4.200	2.750			*5.900	4.000	*7.100	6.450	*10.050	*10.050		
	3,0 m	kg	3.750	2.450	3.950	2.550	5.700	3.750	*8.900	5.800				
	1,5 m	kg	3.600	2.350	3.850	2.450	5.450	3.500	8.550	5.300				
	0,0 m	kg	3.750	2.400	3.800	2.400	5.300	3.350	8.350	5.150				
	-1,5 m	kg	4.200	2.700			5.300	3.350	8.350	5.150	*12.100	10.100		
	-3,0 m	kg	5.400	3.500			5.450	3.500	8.550	5.300	*13.150	10.400		
-4,5 m	kg													



A – Reach from swing center

B – Bucket hook height

C – Lifting capacities, including bucket (760 kg), bucket linkage (200 kg) and bucket cylinder (140 kg)

 – Rating over front

















 – Rating over side


 – Rating at maximum reach

When removing bucket, linkage or cylinder, lifting capacities can be increased by their respective weights.

With 600 mm shoes

## PC210-8 TWO-PIECE BOOM

Arm length	A		7,5 m		6,0 m		4,5 m		3,0 m		1,5 m	
	B											
 2,9 m  760 kg	7,5 m	kg										
	6,0 m	kg	*2.450	2.450	*3.700	2.700	*5.150	4.300				
	4,5 m	kg	*2.400	2.000	4.000	2.650	*5.450	4.100	*6.750	*6.750		
	3,0 m	kg	*2.450	1.800	3.900	2.500	5.750	3.800	*9.050	6.150		
	1,5 m	kg	*2.650	1.700	3.800	2.350	5.500	3.450	8.800	5.400		
	0,0 m	kg	*2.850	1.700	3.650	2.250	5.200	3.200	8.300	4.950	*5.900	*5.900
	-1,5 m	kg	3.150	1.900	3.600	2.200	5.050	3.100	8.100	4.800	*8.750	*8.750
	-3,0 m	kg	3.750	2.300			5.100	3.100	*8.000	4.850	*8.750	*8.750
-4,5 m	kg											
 2,4 m  760 kg	7,5 m	kg										
	6,0 m	kg	*3.950	2.800			*5.450	4.200	*6.900	6.900		
	4,5 m	kg	3.550	2.250	4.000	2.600	*5.800	4.000	*7.900	6.600	*9.550	*9.550
	3,0 m	kg	3.200	2.000	3.900	2.450	5.650	3.700	9.200	5.900		
	1,5 m	kg	3.100	1.900	3.750	2.350	5.400	3.400	8.600	5.250		
	0,0 m	kg	3.200	1.950	3.650	2.250	5.150	3.200	8.200	4.900		
	-1,5 m	kg	3.500	2.150	3.600	2.200	5.100	3.100	8.100	4.850	*9.350	*9.350
	-3,0 m	kg	*3.850	2.700			*5.150	3.200	*7.100	4.950		
-4,5 m	kg											
 1,8 m  760 kg	7,5 m	kg										
	6,0 m	kg	*4.300	3.300			*5.900	4.050	*7.600	6.900		
	4,5 m	kg	4.050	2.600			5.850	3.900	*8.800	6.400	*10.500	*10.500
	3,0 m	kg	3.650	2.300	3.850	2.450	5.600	3.650	9.100	5.700		
	1,5 m	kg	3.500	2.200	3.750	2.350	5.400	3.400	8.450	5.100		
	0,0 m	kg	3.650	2.250	3.700	2.300	5.200	3.200	8.200	4.900		
	-1,5 m	kg	4.100	2.550			5.200	3.200	8.200	4.950		
	-3,0 m	kg										
-4,5 m	kg											



A – Reach from swing center

B – Bucket hook height

C – Lifting capacities, including bucket (760 kg), bucket linkage (200 kg) and bucket cylinder (140 kg)

 – Rating over front

 – Rating over side

 – Rating at maximum reach












When removing bucket, linkage or cylinder, lifting capacities can be increased by their respective weights.


With 600 mm shoes

\* Load is limited by hydraulic capacity rather than tipping. Ratings are based on SAE Standard No. J1097. Rated loads do not exceed 87% of hydraulic lift capacity or 75% of tipping load.



## PC210LC-8 MONO BOOM

Arm length	A		7,5 m		6,0 m		4,5 m		3,0 m		1,5 m			
	B													
 760 kg	7,5 m	kg	*2.800	*2.800		*4.150	*4.150							
	6,0 m	kg	*2.650	*2.650	*3.450	3.200	*4.250	*4.250						
	4,5 m	kg	*2.650	2.500	*4.550	3.150	*4.850	4.750	*5.400	*5.400				
	3,0 m	kg	*2.750	2.250	4.900	3.050	*5.800	4.450	*7.350	7.100	*11.450	*11.450		
	1,5 m	kg	*3.000	2.200	4.750	2.900	*6.750	4.150	*9.250	6.450	*6.350	*6.350		
	0,0 m	kg	*3.400	2.200	4.600	2.750	6.600	3.950	*10.450	6.050	*7.200	*7.200		
	-1,5 m	kg	4.050	2.400	4.550	2.700	6.450	3.800	10.450	5.900	*10.450	*10.450	*6.300	*6.300
	-3,0 m	kg	4.800	2.900			6.450	3.850	*10.450	5.950	*15.250	11.900	*10.050	*10.050
	-4,5 m	kg	*6.300	4.000					*9.000	6.150	*12.950	12.350		




A – Reach from swing center

B – Bucket hook height

C – Lifting capacities, including bucket (760 kg), bucket linkage (200 kg) and bucket cylinder (140 kg)


 – Rating over front


 – Rating over side

 – Rating at maximum reach












When removing bucket, linkage or cylinder, lifting capacities can be increased by their respective weights.


With 600 mm shoes

 760 kg	7,5 m	kg	*4.150	*4.150										
	6,0 m	kg	*3.950	3.450		*4.750	*4.750							
	4,5 m	kg	*3.950	2.850	4.950	3.100	*5.350	4.650	*6.200	*6.200				
	3,0 m	kg	4.150	2.550	4.850	3.000	*6.200	4.350	*8.050	6.900				
	1,5 m	kg	4.050	2.450	4.700	2.850	6.750	4.100	*9.800	6.350				
	0,0 m	kg	4.150	2.500	4.600	2.750	6.550	3.900	10.550	6.000	*6.750	*6.750		
	-1,5 m	kg	4.600	2.750	4.600	2.750	6.450	3.850	10.500	5.950	*11.600	*11.600	*7.300	*7.300
	-3,0 m	kg	5.650	3.400			6.550	3.900	*10.150	6.050	*14.500	12.100	*12.150	*12.150
	-4,5 m	kg	*6.800	5.150					*8.100	6.300	*11.500	*11.500		

 760 kg	7,5 m	kg	*4.950	*4.950									
	6,0 m	kg	*4.550	3.950		*5.450	4.700	*5.750	*5.750				
	4,5 m	kg	*4.550	3.200		*5.900	4.550	*7.100	*7.100	*10.050	*10.050		
	3,0 m	kg	4.600	2.850	4.800	3.000	*6.700	4.300	*8.900	6.700			
	1,5 m	kg	4.450	2.700	4.700	2.900	6.750	4.100	*10.400	6.200			
	0,0 m	kg	4.600	2.800	4.650	2.850	6.550	3.900	10.550	6.000			
	-1,5 m	kg	5.200	3.150			6.550	3.900	10.550	6.000	*12.100	11.950	
	-3,0 m	kg	6.650	4.050			6.700	4.050	*9.600	6.200	*13.150	12.300	
	-4,5 m	kg											

## PC210LC-8 TWO-PIECE BOOM

Arm length	A		7,5 m		6,0 m		4,5 m		3,0 m		1,5 m	
	B											
 760 kg	7,5 m	kg										
	6,0 m	kg	*2.450	*2.450	*3.700	3.150	*5.150	4.900				
	4,5 m	kg	*2.400	2.350	*4.300	3.100	*5.450	4.700	*6.750	*6.750		
	3,0 m	kg	*2.450	2.100	*4.550	2.950	*6.100	4.400	*9.050	7.050		
	1,5 m	kg	*2.650	2.050	4.700	2.800	6.800	4.050	*10.400	6.300		
	0,0 m	kg	*2.950	2.050	4.550	2.650	6.500	3.800	*9.900	5.850	*5.900	*5.900
	-1,5 m	kg	*3.500	2.250	4.500	2.600	6.350	3.650	*9.800	5.700	*8.750	*8.750
	-3,0 m	kg	*3.780	2.750			*5.900	3.700	*8.000	5.750	*8.750	*8.750
	-4,5 m	kg										




A – Reach from swing center

B – Bucket hook height

C – Lifting capacities, including bucket (760 kg), bucket linkage (200 kg) and bucket cylinder (140 kg)


 – Rating over front


 – Rating over side

 – Rating at maximum reach

When removing bucket, linkage or cylinder, lifting capacities can be increased by their respective weights.

With 600 mm shoes




 760 kg	7,5 m	kg										
	6,0 m	kg	*3.950	3.250		*5.450	4.750	*6.900	*6.900			
	4,5 m	kg	*3.900	2.650	4.900	3.000	*5.800	4.600	*7.900	7.500	*9.550	*9.550
	3,0 m	kg	4.000	2.350	4.800	2.900	*6.450	4.300	*9.650	6.800		
	1,5 m	kg	3.850	2.250	4.650	2.750	6.700	3.950	*10.600	6.150		
	0,0 m	kg	3.950	2.300	4.550	2.650	6.450	3.750	*10.400	5.800		
	-1,5 m	kg	4.400	2.550	4.500	2.650	6.350	3.700	*9.250	5.700	*9.350	*9.350
	-3,0 m	kg	*3.850	3.200			*5.150	3.750	*7.100	5.850		
	-4,5 m	kg										


 760 kg	7,5 m	kg										
	6,0 m	kg	*4.300	3.800		*5.900	4.650	*7.600	7.850			
	4,5 m	kg	*4.200	3.050		*6.250	4.500	*8.800	7.350	*10.500	*10.500	
	3,0 m	kg	*4.300	2.700	4.750	2.850	6.900	4.200	*10.350	6.600		
	1,5 m	kg	4.350	2.600	4.650	2.750	6.650	3.950	10.700	6.000		
	0,0 m	kg	4.500	2.650	4.600	2.700	6.500	3.800	*10.050	5.800		
	-1,5 m	kg	*4.750	3.000			*6.450	3.800	*8.500	5.800		
	-3,0 m	kg										
	-4,5 m	kg										

\* Load is limited by hydraulic capacity rather than tipping. Ratings are based on SAE Standard No. J1097. Rated loads do not exceed 87% of hydraulic lift capacity or 75% of tipping load.

# Lifting Capacity

## PC210NLC-8 MONO BOOM

Arm length	A		⊕		7,5 m		6,0 m		4,5 m		3,0 m		1,5 m	
	B		🏗️	🛠️	🏗️	🛠️	🏗️	🛠️	🏗️	🛠️	🏗️	🛠️	🏗️	🛠️
 2,9 m 760 kg	7,5 m	kg	*2.800	*2.800			*4.150	*4.150						
	6,0 m	kg	*2.650	2.550	*3.450	2.750	*4.250	*4.250						
	4,5 m	kg	*2.650	2.150	*4.550	2.700	*4.850	4.100	*5.400	*5.400				
	3,0 m	kg	*2.750	1.900	4.950	2.600	*5.800	3.800	*7.350	6.050	*11.450	*11.450		
	1,5 m	kg	*3.000	1.800	4.800	2.450	*6.750	3.550	*9.250	5.350	*6.350	*6.350		
	0,0 m	kg	*3.400	1.850	4.650	2.350	6.650	3.300	*10.450	5.100	*7.200	*7.200		
	-1,5 m	kg	4.100	2.000	4.600	2.300	6.500	3.150	10.600	4.800	*10.450	8.800	*6.300	*6.300
	-3,0 m	kg	4.850	2.400			6.550	3.200	*10.450	4.950	*15.250	9.600	*10.050	*10.050
	-4,5 m	kg	*6.300	3.400					*9.000	5.150	*12.950	10.000		
 2,4 m 760 kg	7,5 m	kg	*4.150	4.150										
	6,0 m	kg	*3.950	2.950			*4.750	4.150						
	4,5 m	kg	*3.950	2.450	*4.950	2.650	*5.350	4.000	*6.200	*6.200				
	3,0 m	kg	*4.200	2.150	4.900	2.550	*6.200	3.750	*8.050	5.850				
	1,5 m	kg	4.100	2.050	4.750	2.400	6.850	3.500	*9.800	5.200				
	0,0 m	kg	4.200	2.100	4.650	2.350	6.650	3.300	10.700	5.050	*6.750	*6.750		
	-1,5 m	kg	4.650	2.300	4.650	2.300	6.550	3.200	10.600	4.800	*11.600	8.900	*7.300	*7.300
	-3,0 m	kg	5.700	2.850			6.600	3.300	*10.150	5.050	*14.500	9.750	*12.150	*12.150
	-4,5 m	kg	*6.800	4.350					*8.100	5.300	*11.500	10.250		
 1,8 m 760 kg	7,5 m	kg	*4.950	*4.950										
	6,0 m	kg	*4.550	3.400			*5.450	4.050	*5.750	*5.750				
	4,5 m	kg	*4.550	2.750			*5.900	3.950	*7.100	6.300	*10.050	*10.050		
	3,0 m	kg	4.650	2.400	4.850	2.550	*6.700	3.700	*8.900	5.700				
	1,5 m	kg	4.500	2.300	4.750	2.450	6.800	3.450	*10.400	5.100				
	0,0 m	kg	4.700	2.350	4.700	2.400	6.600	3.300	10.650	5.000				
	-1,5 m	kg	5.250	2.650			6.600	3.250	10.650	4.850	*12.100	9.050		
	-3,0 m	kg	6.750	3.400			6.800	3.450	*9.600	5.200	*13.150	10.000		
	-4,5 m	kg												



A – Reach from swing center  
B – Bucket hook height

C – Lifting capacities, including bucket (760 kg), bucket linkage (200 kg) and bucket cylinder (140 kg)

🏗️ – Rating over front




🛠️ – Rating over side


⊕ – Rating at maximum reach

When removing bucket, linkage or cylinder, lifting capacities can be increased by their respective weights.

With 500 mm shoes

## PC210NLC-8 TWO-PIECE BOOM

Arm length	A		⊕		7,5 m		6,0 m		4,5 m		3,0 m		1,5 m	
	B		🏗️	🛠️	🏗️	🛠️	🏗️	🛠️	🏗️	🛠️	🏗️	🛠️	🏗️	🛠️
 2,9 m 760 kg	7,5 m	kg												
	6,0 m	kg	*2.450	2.400	*3.700	2.650	*5.150	4.250						
	4,5 m	kg	*2.400	2.000	*4.300	2.600	*5.450	4.050	*6.750	6.700				
	3,0 m	kg	*2.450	1.750	*4.550	2.500	*6.100	3.750	*9.050	5.950				
	1,5 m	kg	*2.650	1.650	4.750	2.300	6.850	3.400	*10.400	5.250				
	0,0 m	kg	*2.950	1.700	4.600	2.200	6.550	3.150	*9.900	4.850	*5.900	*5.900		
	-1,5 m	kg	*3.500	1.850	4.550	2.150	6.450	3.050	*9.800	4.700	*8.750	*8.750		
	-3,0 m	kg	*3.800	2.250			*5.900	3.050	*8.000	4.750	*8.750	*8.750		
	-4,5 m	kg												
 2,4 m 760 kg	7,5 m	kg												
	6,0 m	kg	*3.950	2.750			*5.450	4.100	*6.900	6.700				
	4,5 m	kg	*3.900	2.200	4.950	2.550	*5.800	3.900	*7.900	6.450	*9.550	*9.550		
	3,0 m	kg	*4.000	1.950	4.850	2.450	*6.450	3.650	*9.650	7.550				
	1,5 m	kg	3.900	1.850	4.700	2.300	6.750	3.350	*10.600	5.100				
	0,0 m	kg	4.000	1.900	4.600	2.200	6.550	3.100	*10.400	4.750				
	-1,5 m	kg	4.450	2.100	4.550	2.200	6.450	3.050	*9.250	4.750	*9.350	9.050		
	-3,0 m	kg	*3.850	2.650			*5.150	3.150	*7.100	4.800				
	-4,5 m	kg												
 1,8 m 760 kg	7,5 m	kg												
	6,0 m	kg	*4.300	3.250			*5.900	4.000	*7.600	6.750				
	4,5 m	kg	*4.200	2.550			*6.250	3.850	*8.800	6.250	*10.500	*10.500		
	3,0 m	kg	*4.300	2.250	4.800	2.400	*6.900	3.600	*10.350	5.550				
	1,5 m	kg	4.400	2.150	4.700	2.300	6.750	3.300	*10.750	5.000				
	0,0 m	kg	4.550	2.200	4.650	2.250	6.550	3.150	*10.050	4.750				
	-1,5 m	kg	*4.750	2.500			*6.450	3.150	*8.500	4.800				
	-3,0 m	kg												
	-4,5 m	kg												



A – Reach from swing center  
B – Bucket hook height

C – Lifting capacities, including bucket (760 kg), bucket linkage (200 kg) and bucket cylinder (140 kg)

🏗️ – Rating over front

🛠️ – Rating over side

⊕ – Rating at maximum reach

When removing bucket, linkage or cylinder, lifting capacities can be increased by their respective weights.

With 500 mm shoes


\* Load is limited by hydraulic capacity rather than tipping. Ratings are based on SAE Standard No. J1097. Rated loads do not exceed 87% of hydraulic lift capacity or 75% of tipping load.



# Super Long Front Specification


## WORK EQUIPMENT

<b>Boom</b>	
Length (a) .....	8.795 mm
Height (b) .....	1.555 mm
Weight .....	2.200 kg
<b>Arm</b>	
Length (c) .....	7.375 mm
Height (d) .....	1.000 mm
Weight .....	1.350 kg

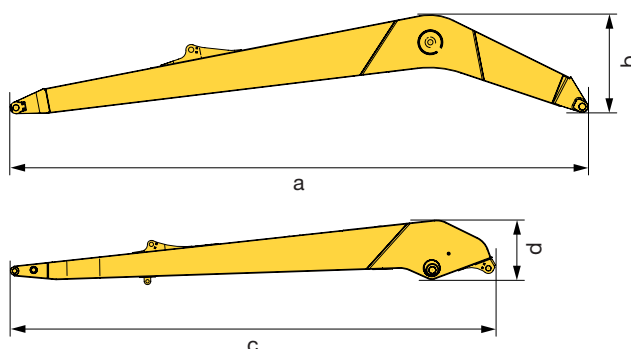

## TRANSPORT DIMENSIONS

M	Transport length	12.435 mm
N	Length on ground (transport)	4.725 mm
O	Overall height (to top of boom)	3.390 mm

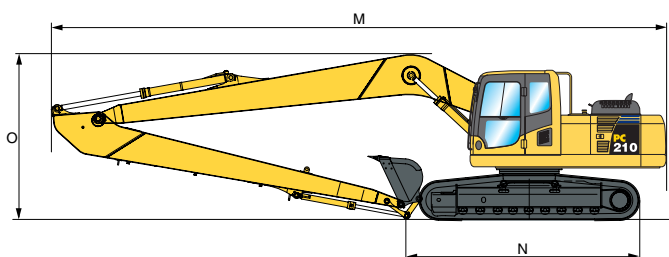

## MAX. BUCKET CAPACITY AND WEIGHT

	PC210LC-8		PC210NLC-8	
<b>General purpose bucket</b>				
Max. bucket width	955 mm			
Material weight up to 1,2 t/m <sup>3</sup>	0,66 m <sup>3</sup>	525 kg	0,48 m <sup>3</sup>	425 kg
Material weight up to 1,5 t/m <sup>3</sup>	0,56 m <sup>3</sup>	475 kg	0,41 m <sup>3</sup>	400 kg
Material weight up to 1,8 t/m <sup>3</sup>	0,49 m <sup>3</sup>	425 kg	0,36 m <sup>3</sup>	375 kg
<b>Ditch cleaning bucket</b>				
Max. bucket width	2.100 mm			
Material weight up to 1,2 t/m <sup>3</sup>	* 1.300 kg		* 1.000 kg	
Material weight up to 1,5 t/m <sup>3</sup>	* 1.300 kg		* 1.000 kg	
Material weight up to 1,8 t/m <sup>3</sup>	-		-	

\* Maximum load at end of arm (bucket + payload).

Max. capacity and weight have been calculated according to ISO 10567:2007.

Please consult with your distributor for the correct selection of buckets and attachments to suit the application.


## OPERATING WEIGHT (APPR.)

	PC210LC-8		PC210NLC-8	
	Operating weight	Ground pressure	Operating weight	Ground pressure
Triple grouser shoes				
500 mm	-	-	24.010 kg	0,60 kg/cm <sup>2</sup>
600 mm	24.170 kg	0,51 kg/cm <sup>2</sup>	24.370 kg	0,52 kg/cm <sup>2</sup>
700 mm	24.530 kg	0,44 kg/cm <sup>2</sup>	24.730 kg	0,44 kg/cm <sup>2</sup>
800 mm	24.890 kg	0,39 kg/cm <sup>2</sup>	-	-
900 mm	25.250 kg	0,36 kg/cm <sup>2</sup>	-	-

Operating weight, including Super Long Front work equipment, bucket, operator, lubricant, coolant, full fuel tank and the standard equipment.

# Super Long Front Specification

## Working range PC210LC/NLC-8 Super Long Front

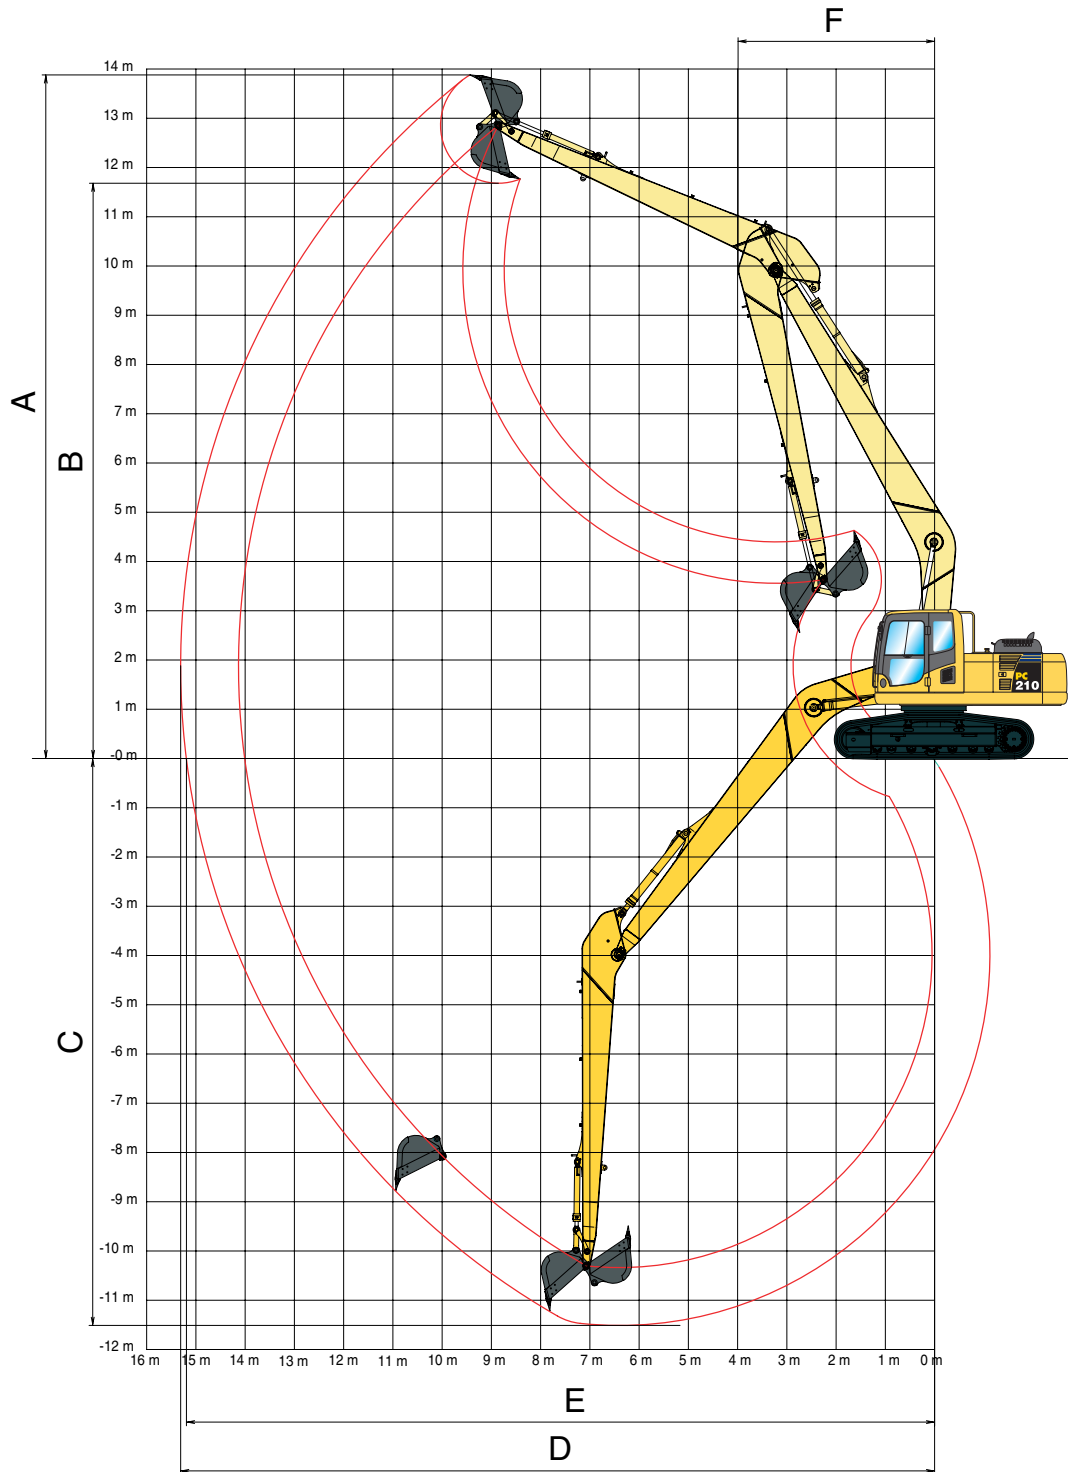

### SUPER LONG FRONT

A	Max. digging height	13.880 mm
B	Max. dumping height	11.680 mm
C	Max. digging depth	11.510 mm
D	Max. digging reach	15.250 mm
E	Max. digging reach at ground level	15.190 mm
F	Min. swing radius	3.990 mm

## Lifting capacity PC210LC/NLC-8 Super Long Front


A – Reach from swing center

 – Rating over front


B – Bucket hook height

 – Rating over side







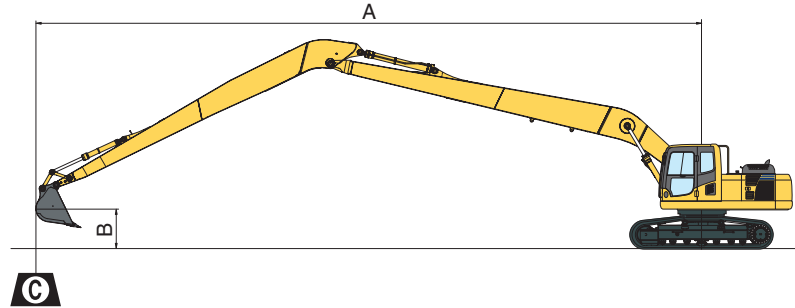






C – Lifting capacities, including bucket (367 kg)

 – Rating at maximum reach














When removing bucket, linkage or cylinder, lifting capacities can be increased by their respective weights.



### PC210LC-8 With 700 mm shoes

A			14,0 m		12,0 m		10,0 m		8,0 m		6,0 m		
													
10,0 m	kg	950*	950*				1.750*	1.750*					
6,0 m	kg	950*	950*		2.050*	1.750	2.050*	2.050*					
3,0 m	kg	1.000*	1.000	1.500*	1.100	2.400*	1.550	2.650*	2.250	3.100*	3.100*	3.950*	3.950*
0,0 m	kg	1.200*	950	1.650*	1.000	2.400	1.400	3.200	1.950	4.200*	2.800	5.900*	4.200
-3,0 m	kg	1.550*	1.000			2.250	1.250	3.000	1.750	4.200	2.450	6.450	3.700
-6,0 m	kg	2.250	1.250			2.250	1.250	2.950	1.700	4.100	2.350	6.400	3.650
-9,0 m	kg	3.400	2.000							4.250	2.550	6.050	3.900

### PC210NLC-8 With 500 mm shoes

A			14,0 m		12,0 m		10,0 m		8,0 m		6,0 m		
													
12,0 m	kg	1.050*	1.050*					1.200*	1.200*				
10,0 m	kg	950*	950*					1.750*	1.750*				
6,0 m	kg	950*	900		2.050*	1.400	2.050*	2.050*					
3,0 m	kg	1.000*	750	1.500*	800	2.400*	1.200	2.650*	1.800	3.100*	2.700	3.950*	3.950*
0,0 m	kg	1.200*	650	1.650*	700	2.250	1.050	3.100	1.500	4.200*	2.200	5.900*	3.350
-3,0 m	kg	1.550*	700			2.150	900	2.850	1.300	4.000	1.900	6.200	2.850
-6,0 m	kg	2.150	950			2.150	900	2.800	1.250	3.900	1.800	6.100	2.800
-9,0 m	kg	3.250	1.550							4.100	1.950	6.050*	3.050
-10,0 m	kg	3.750*	2.050							3.800*	2.100	5.350*	3.200

\* Load is limited by hydraulic capacity rather than tipping. Ratings are based on SAE Standard No. J1097. Rated loads do not exceed 87% of hydraulic lift capacity or 75% of tipping load. Lifting capacity table is published for guidance only, the machine is not intended for use as a crane.

# Hydraulic Excavator

## PC210/LC/NLC-8

### Standard and Optional Equipment

#### ENGINE

Komatsu SAA6D107E-1 turbocharged common rail direct injection diesel engine	●
EU Stage IIIA compliant	●
Suction type cooling fan with radiator fly screen	●
Automatic engine warm-up system	●
Engine overheat prevention system	●
Fuel control dial	●
Auto-deceleration function	●
Engine key stop	●
Engine ignition can be password secured on request	●
Alternator 24 V/60 A	●
Starter motor 24 V/5,5 kW	●
Batteries 2 × 12 V/140 Ah	●
Diesel particulate filter	○

#### HYDRAULIC SYSTEM

Electronic closed-centre load sensing (E-CLSS) hydraulic system (HydrauMind)	●
Pump and engine mutual control (PEMC) system	●
One additional hydraulic circuit (optional with Super Long Front)	●
5-working mode selection system; Power mode, economy mode, breaker mode, attachment mode and lifting mode	●
PowerMax function	●
Adjustable PPC wrist control levers for arm, boom, bucket and swing, with sliding proportional control for attachments and 3 auxiliary buttons	●
Prepared for hydraulic quick-coupler (not with Super Long Front)	●
Additional hydraulic functions (not with Super Long Front)	○

#### UNDERCARRIAGE

Track roller guards	●
Track frame under-guards	●
STD, LC and NLC undercarriages	○
500, 600, 700, 800, 900 mm triple grouser track-shoes	○
Full length track roller guards	○

#### CABIN

Reinforced safety SpaceCab™; Highly pressurised and tightly sealed hyper viscous mounted cab with tinted safety glass windows, large roof window with sun shade, pull-up type front window with locking device, removable lower window, front window wiper with intermittent feature, sun roller blind, cigarette lighter, ashtray, luggage shelf, floor mat	●
Heated air suspension seat with lumbar support, height adjustable arm rests and retractable seat belt	●
Automatic climate control system	●
12 Volt power supply	●
Beverage holder and magazine rack	●
Hot and cool box	●
Radio	●
Lower wiper	○
Rain visor (not with OPG)	○

#### SERVICE AND MAINTENANCE

Automatic fuel line de-aeration	●
Double element type air cleaner with dust indicator and auto dust evacuator	●
KOMTRAX™ - Komatsu satellite monitoring system	●
Multi-function video compatible colour monitor with Equipment Management and Monitoring System (EMMS) and efficiency guidance	●
Toolkit and spare parts for first service	●
Automatic greasing system	○
Service points	○

#### WORK EQUIPMENT

Mono boom	○
Two-piece boom	○
Super Long Front boom and arm (15 m) (LC/NLC only)	○
1,8 m; 2,4 m; 2,9 m arms	○
Bucket linkage with lifting eye	○
Komatsu buckets	○
Komatsu breakers	○

#### SAFETY EQUIPMENT

Rear view camera system	●
Electric horn	●
Overload warning device	●
Lockable fuel cap and covers	●
Audible travel alarm	●
Boom safety valves	●
Large handrails, rear-view mirrors	●
Battery main switch	●
Arm safety valve (not with Super Long Front)	●
OPG Level II front guard (FOPS)	○
OPG Level II top guard (FOPS)	○

#### DRIVES AND BRAKES

Hydrostatic, 3-speed travel system with automatic shift and planetary gear type final drives, and hydraulic travel and parking brakes	●
PPC control levers and pedals for steering and travel	●

#### LIGHTING SYSTEM

Working lights: 2 revolving frame, 1 boom (l.h.)	●
Additional working lights: 4 cab roof (front), 1 cab roof (rear), 1 boom (r.h.), 1 counterweight (rear), beacon	○

#### OTHER EQUIPMENT

Standard counterweight	●
Heavy counterweight (with Super Long Front)	●
Remote greasing for swing circle and pins	●
Electric refuelling pump with automatic shut off function	●
Standard colour scheme and decals	●
Parts book and operator manual	●
Biodegradable oil for hydraulic system	○
Customised paint	○

Further equipment on request

- standard equipment
- optional equipment

Your Komatsu partner:

# KOMATSU

**Komatsu Europe International NV**  
 Mechelsesteenweg 586  
 B-1800 VILVOORDE (BELGIUM)  
 Tel. +32-2-255 24 11  
 Fax +32-2-252 19 81  
[www.komatsu.eu](http://www.komatsu.eu)

UESS11010 1/2017

Materials and specifications are subject to change without notice.  
**KOMATSU** is a trademark of Komatsu Ltd. Japan.